

TIRE STOP LEA

ΕΥΕΛ ΚΝΙΕΥΕΛ



PART NUMBER
EK 122
TIRE SEALANT

CONTENTS 8 oz

STOP LEAK



"Wear your helmet when you're riding."

Kneevel

CONTENTS 8 oz.

AK

EVEL KNEI
TIRE STOP-LEAK

Use Evel Knievel Tire Stop
(even new ones) to prevent
caused by:

1. Small punctures
2. Rubber porosity
3. Burrs on rim
4. Tire imperfections

DIRECTIONS

1. Shake thoroughly. Remove cap and invert bottle.
2. Remove valve core. With cap in right position, force cap into tire by twisting bottle clockwise. Sealant will flow into tire.
3. Replace valve core before riding. Inflate tire slowly to thoroughly coat fluid on the inner surface.

"Wear your helmet when you're riding."

Evel

Packaged by
Technical Chemicals
10737 Spangler
Dallas, Texas 75243

**EVEL KNIEVEL
TIRE STOP-LEAK**

Evel Knievel Tire Stop Leak in all tires
(on new ones) to prevent loss of air
caused by:

1. Small punctures.
2. Rubber porosity.
3. Burrs on rims.
4. Tire imperfections.


DIRECTIONS:

Shake thoroughly. Remove cap from
bottle.

Remove valve core. With bottle in up-
right position, force cap onto valve stem by
rotating bottle clockwise. Squeeze contents
into tire.

Replace valve core before inflating. Ro-
tate tire slowly to thoroughly distribute the
product on the inner surface.

Packaged By
Technical Chemical Co.
10737 Spangler Rd.
Dallas, Texas 75220

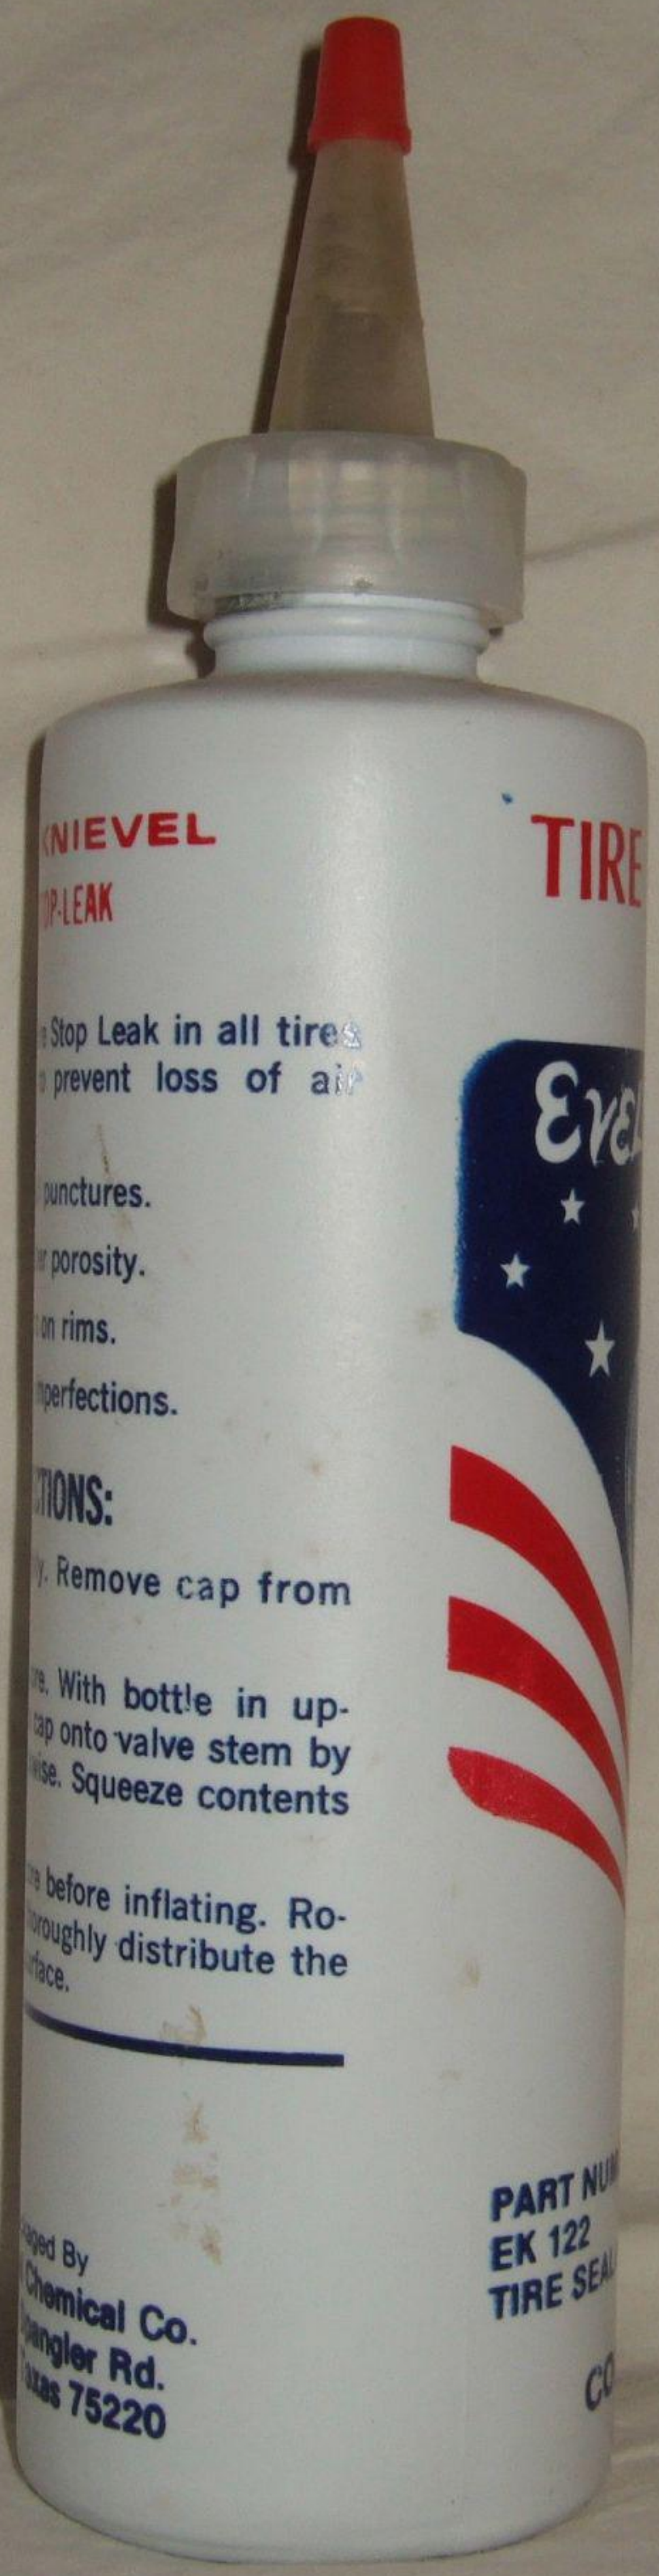

EVE
STOP-LEAK

TIRE

Stop Leak in all tires
to prevent loss of air

punctures.

porosity.

on rims.

imperfections.

INSTRUCTIONS:

Remove cap from

With bottle in up-
cap onto valve stem by
ise. Squeeze contents

before inflating. Ro-
oroughly distribute the
urface.

Manufactured By
Chemical Co.
Angler Rd.
Texas 75220

PART NUM
EK 122
TIRE SEAL

CO

TIRE STOP



**PART NUMBER
EK 122
TIRE SEALANT**

CONTENTS



TIRE STOP LEAK

Knievel



PART NUMBER
EX 122
TIRE SEALANT

CONTENTS 8 oz.



